

4x4 PRODUCT ADVICE 4WDJS

Description: 4WD Joining Strap
Application: To safely join two straps together
Ratings: N/A

Safety Factor: N/A
Standard: N/A
Size: 50mm / 250mm
Part #: 4WDJS

Recovery Load Limit R.L.L.®. The maximum load that may be applied to equipment used in the recovery role.

Minimum Breaking Strength. MBS. The minimum load necessary to cause equipment to fail or fracture.

Factor of Safety. F of S. A number divided into the minimum breaking strength to determine the recovery load limit.

Safety Warning: *Use of this product and participation involves inherent risks of injury or death.*

This product must not be used for any lifting purposes. Inspect complete strap before each use. Protect webbing strap from abrasion and sharp edges. Do not use the strap if cut or damaged. Do not tie knots in webbing strap. Only use the correct strap for its designed purpose. Evaluate each situation and use the correct rated product that will best suit. Do not attach any strap to a standard tow ball, standard vehicle tie-down point or a standard nudge or bull bar. Attach only to a suitable rated recovery point or device. Refer to manufacturer's recommendations. Always follow our product instructions and if in doubt, ask an expert. Driver Trainers are such people, with full knowledge and expertise advice. Keep all persons clear while recovery is in progress, at least the same distance away from the vehicles as the length of the strap is, in the opposite direction. Use a blanket, towel or our specially designed Safety Weight Blanket and place it over the middle of the strap to absorb the re-coil action should any equipment fail. Outside parameters can reduce the life and capacity of the strap. Strength and characteristics are reduced when wet. Keep away from any chemicals and out of direct sunlight. Clean dirt, sand, etc from the strap with water and mild detergent if required, and allow to dry prior to storing in our specially designed recovery bags.


Note: The user of this strap assumes all risk and liability for its handling and use.

Designed use:

Safety first, a must have if joining two straps together.

Never join 2 straps together with a shackle

- Take two straps, call them strap A and strap B.
- Take an eyelet of strap A and pass it through the eyelet of strap B.
- Take the other end of strap B and pass it through the eyelet of strap A.
- This becomes a standard **REEF KNOT**.
- Then place the Joining strap in the middle of the knot.

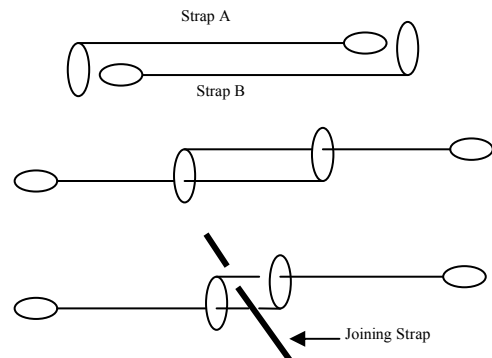

Phone: 02 9894 1899
Fax: 02 9894 1811
Email: info@juststraps.com.au
Web: www.juststraps.com.au



Just strap it and GO!®

Copyright © 2007