



RATCHET BUCKLE ASSEMBLIES

REF: AW107


Basic Steps of Operation

To Tie Down:

1. Secure Hooks on either side of load.
2. Insert free end of strap through slot A and take up slack.
3. Push down and pull up handle B to work the ratchet till strap is as tight as possible. (Do not over tighten as you may damage the object you are tying down).
4. Ensure at least 2 to 3 revolutions of webbing are around centre cam A.
5. Push Handle B down to lock your Tie-Down.

To Release:

1. Pull back on quick release C and hold.
2. Pull handle B up and over to a fully open flat position.
3. Pull Tie-Down up to loosen strap and remove from slot A.

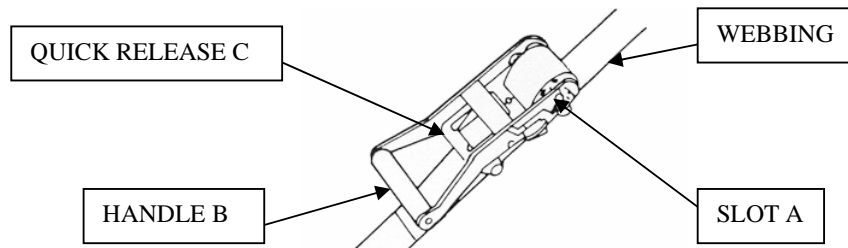

- To be used as a guide only.
- Other Reference Document AW116 Use and Care Instructions.

Please Note: Lubricate all moving parts on a regular basis.