

# JUST STRAPS®


## The Australian Made Tie-Down

### USE AND CARE INSTRUCTIONS

### MARINE TIE-DOWN STRAPS

REF: AW132

#### PADDLE BUCKLE

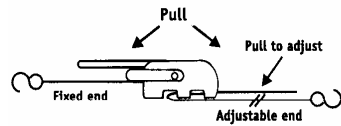


#### Instructions

1. Connect both hooks on
2. Have lever facing flat towards fixed end  
Pull end of strap to tension
3. Pull lever back down onto adjusted webbing end until tight
4. To release lift lever back up  
Pull webbing strap through buckle until loose

**CAUTION:** PROTECT WEBBING FROM SHARP EDGES.  
ENSURE LOAD IS SECURE BEFORE TRAVELLING  
REGULAR CHECKS, PROPER USE AND INSTALLATION  
MUST BE OBSERVED AT ALL TIMES

#### RATCHET BUCKLE

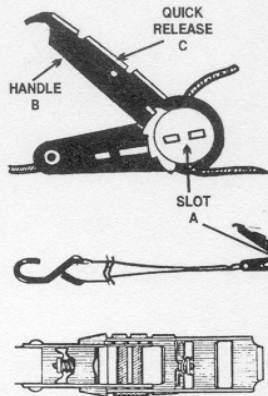

#### INSTRUCTIONS

##### TO TIE DOWN


1. Insert strap through Slot A and take up slack.
2. Push down and pull up Handle B to work the ratchet till strap is as tight as possible (do not over tighten as you may damage the object you are tying down).
3. Push Handle B down to lock your Tie-Down

##### TO RELEASE

1. Pull back on Quick Release C and Hold.
2. Pull Handle B up and over to a fully open flat position.
3. Pull Tie-Down up to loosen strap and remove from Slot A.

**Caution:** Protect webbing from sharp edges. Ensure load is secure before travelling. Regular checks, proper use and installations must be observed at all times.

#### OVER CENTRE BUCKLE

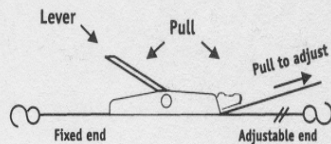

#### Instructions


1. Connect both hooks on
2. Have lever facing flat towards fixed end  
Pull end of strap to tension
3. Pull lever back down onto adjusted webbing end until tight
4. To release lift lever back up  
Pull webbing strap through buckle until loose

**CAUTION:** PROTECT WEBBING FROM SHARP EDGES.  
ENSURE LOAD IS SECURE BEFORE TRAVELLING  
REGULAR CHECKS, PROPER USE AND INSTALLATION  
MUST BE OBSERVED AT ALL TIMES

## GUNWALE LEVER

### FITTING INSTRUCTIONS

Thread free end of webbing through tri-glide buckle (1), then through hook (2), and back through the inside of tri-glide buckle (1). Pass fixed hook end (3) through lever aperture (4) with lever hanging down. Attach hooks to either side of trailer. Adjust webbing through tri-glide buckle (1), until tight. Tension strap by rotating lever (4) clockwise up and over webbing and clip lever end under to secure.

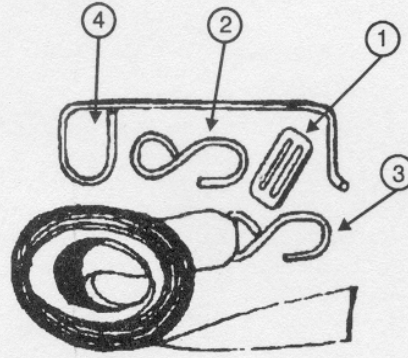


**Caution:** Protect webbing from sharp edges. Ensure load is secure before travelling, regular checks, proper use and installation must be observed at all times.

## PLASTIC BUCKLE

### INSTRUCTIONS FOR USE:

Begin by placing the buckle end over the article to be secured. Then guide the strap under the roof rack (or bar, or hook or whatever) and return it back over the article towards you. Once you have done this, insert the non-buckle end through the buckle as illustrated.

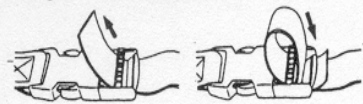

1. Guide the free end under, then up through the slit in the buckle.
2. Loop the free end over, then back down through the slit again.



3. Pull the strap through the buckle till it tightens. (Always make sure the strap is as tight as possible.)
4. Once the strap is taut, ensure the article being carried is securely held.



5. To release buckle, simply press both side buttons as shown in diagram.
6. When both side buttons are depressed fully, the buckle will come apart easily.

**Caution:** Protect webbing from sharp edges. Ensure load is secure before travelling. Regular checks, proper use and installation must be observed at all times.


## METAL CAM BUCKLE

### INSTRUCTIONS FOR USE:


Begin by placing the buckle end over the article to be secured. Then guide the strap under the roof rack (or bar, or hook or whatever) and return it back over the article towards you. Once you have done this, insert webbing into cam buckle as illustrated.



1. Guide the free end under, then up through the slit in the buckle

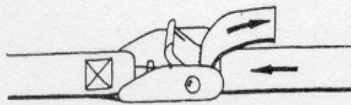

2. Pull the strap through the buckle till it tightens. (Always make sure the strap is as tight as possible.) Once the strap is taut, ensure the article being carried is securely held.

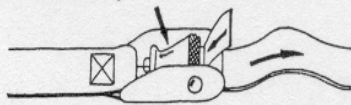

3. To release press cam buckle indicated by arrow in diagram and remove webbing

**Caution:** Protect webbing from sharp edges. Ensure load is secure before travelling. Regular checks, proper use and installation must be observed at all times.

## NOTE:

To be used as a reference and guide.

The user of this strap assumes all risk and liability for its handling and use.