

## TIE-DOWNS PRODUCT ADVICE TS9

**Description:** Medium Duty Hand Ratchet Strap  
**Application:** Tradesperson, Couriers  
**Standard:** Manufactured to Australian Standard AS/NZS 4380:2001  
**Ratings:** 650Kg Lashing Capacity LC  
 1,300Kg Minimum Breaking Strength MBS  
**Safety Factor:** 2 to 1 Factor of Safety (F of S)  
**Size:** 50mm / 6 metre  
**Part #:** TS9



### WARNING:

- Not to be used for lifting.
- Inspect complete strap before use.
- Keep away from any chemicals.
- Protect from abrasion and sharp edges.
- Never overload any lashing system.
- Lubricate all moving parts on a regular basis.
- Select the correct lashing system for the appropriate application.
- Web lashings shall be withdrawn from service if there is cause to doubt its fitness for use.
- Use only legibly marked and labeled web lashings, that comply to Australian Standards AS/NZS 4380.
- It is the responsibility of the owner, the driver and the person in charge of the loading to ensure that a vehicle's load restraint and attachments, and the load securing equipment are serviceable and strong enough for their application.
- Understand the designed use and product ratings prior to use. Ensure the load is secure before traveling. Regular checks, proper use and installation must be observed at all times.
- Note: The user of this strap assumes all risk and liability for its handling and use.

### Designed use: Guide only:

#### To Tie Down:

- Secure hooks on either side of load and pull back on quick release C and lift handle B up about half way to open the ratchet. Insert free end of strap through slot A and pull through excess webbing. Push down and pull up handle B to work the ratchet till strap is as tight as possible. (Do not over tighten as you may damage the object you are tying down). Ensure at least 2 to 3 revolutions of webbing are around centre cam A. Push handle B down to lock your tie-down.

#### To Release:

- Pull back on quick release C and hold. Pull handle B up and over to a fully open position (180°). Pull tie-down up to loosen the strap and remove from slot A. Lubricate all moving parts on a regular basis.

#### Features:


- Medium duty ratchet with wide handle for ease of use.
- Has large coated S hooks at both ends.
- Computerised sewing ensures the quality of every product.

**Lashing Capacity. LC.** The capacity to sustain in use in a straight line pull.

**Minimum Breaking Strength. MBS.** The minimum load necessary to cause equipment to fail or fracture.

**Factor of Safety. F of S.** A number divided into the minimum breaking strength to determine the lashing capacity.

**Phone:** 02 9894 1899  
**Fax:** 02 9894 1811  
**Email:** [info@juststraps.com.au](mailto:info@juststraps.com.au)  
**Web:** [www.juststraps.com.au](http://www.juststraps.com.au)

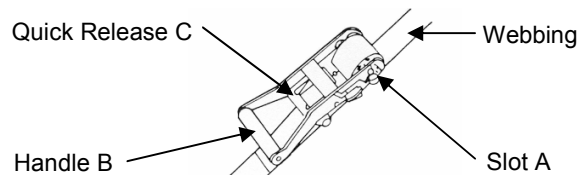

**Just strap it and GO!**

Copyright © 2007